

Model no.: UST-10B

Miniature Audio Transducer (External drive circuitry)

♦FEATURES


- ◆ Compact Small and Slim Size of 11.0mmW×14.0mmL×3.0mmH
- ♠ Low Profile Design
- ♦ For Reflow Process
- ◆ Tape and Reel Packing
- ◆ RoHS Compliants and Lead Free are Applied.

♦ SPECIFICATIONS

Rated Voltage	V p-p	5.0
Operating Voltage	V p-p	4.0~6.0
Rated Current	mA	Max 70
Coil Resistance	Ω	43±3
Sound output at 10cm	dB	Min 87
Resonant Frequency	Hz	2,700
Operating Temperature	°C	−40 ~ + 105
Storage Temperature	°C	- 40 ~ + 105
Weight	g	Max 1.0

● Value Applying Rated Voltage (2,700Hz, ½ duty, square wave)

♦ DIMENSIONS

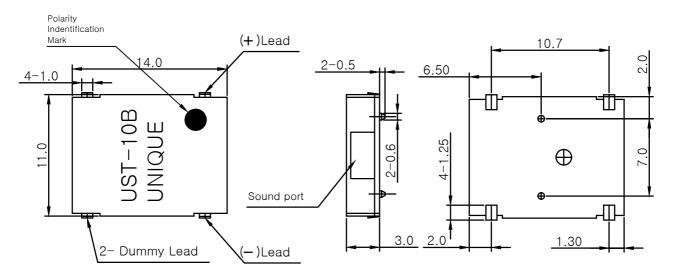

 $\begin{array}{c} \text{UNIT: mm} \\ \text{TOLERANCE:} \pm 0.2 \\ \text{CASE MATERIAL: LCP(Black)} \end{array}$