



Coilmaster Electronics Co., Ltd.

9F-3 No.398, Huan Bei Rd. Chung Li City, Taoyuan 320, Taiwan
Tel : +886-3-422-8279 Fax : +886-3-422-8734

E-mail : info@coilmaster.com.tw

Web Site : www.coilmaster.com.tw

SPS4012 SERIES ~ Shielded Power Inductors



RoHS Compliant

FEATURES

- Excellent shielded construction .
- Low profile inductor (4.1x4.1x1.3 mm Max.)
- Lowest DCR / large currents .
- Low buzz noise
- Lead Free and RoHS compliant .

Applications :


Mobil phone , Notebook computers, PC cards, wireless communication and handheld devices.

PART NUMBERING SYSTEM

SPS	4012	—	1R0M	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

SHAPES AND DIMENSIONS


UNIT : mm

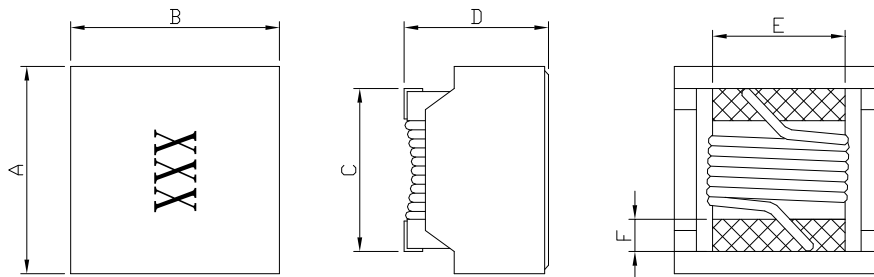

A=4.1 Max. B=4.1 Max. C=2.48±0.1 D=1.3 Max. E=2.0±0.1 F=0.5±0.07

RECOMMENDED PATTERNS

UNIT : mm

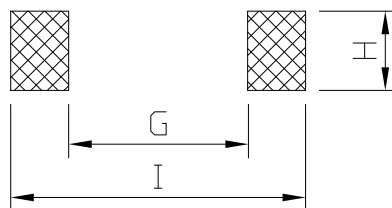

G=1.27 Ref. H=2.54 Ref. I=3.31 Ref.



SPS4012 SERIES ~ Shielded Power Inductors



RoHS Compliant

SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μH)	DCR (Ω) (Max)	Isat (Max)	Irms (Max)
SPS4012-1R0M-LF	1.0±20%	0.084	2.10	1.45
SPS4012-2R2M-LF	2.2±20%	0.120	1.35	1.10
SPS4012-3R3M-LF	3.3±20%	0.168	1.05	0.95
SPS4012-4R7M-LF	4.7±20%	0.192	0.95	0.90
SPS4012-6R8M-LF	6.8±20%	0.240	0.77	0.80
SPS4012-100M-LF	10±20%	0.312	0.62	0.70
SPS4012-150M-LF	15±20%	0.540	0.52	0.60
SPS4012-220M-LF	22±20%	0.624	0.45	0.54
SPS4012-330M-LF	33±20%	1.020	0.35	0.42
SPS4012-470M-LF	47±20%	1.200	0.30	0.37

- Inductance is measured with a LCR meter HP4284A or equivalent .
- Isat: DC current at which the inductance drops 35% (typ.) from its value without current. .
- Irms: Average current for a 40°C rise above 25°C ambient
- Operating temperature range -40°C to +105°C.
- Electrical specifications at 25°C.
- Packing : 13" reel, machine-ready ,embossed plastic tape (3,500 parts per full reel) .