

Shielded SMD Power Inductors - SRS105B SERIES




PART NUMBERING SYSTEM


SRS	105B	—	101M	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

SHAPES AND DIMENSIONS

UNIT : mm

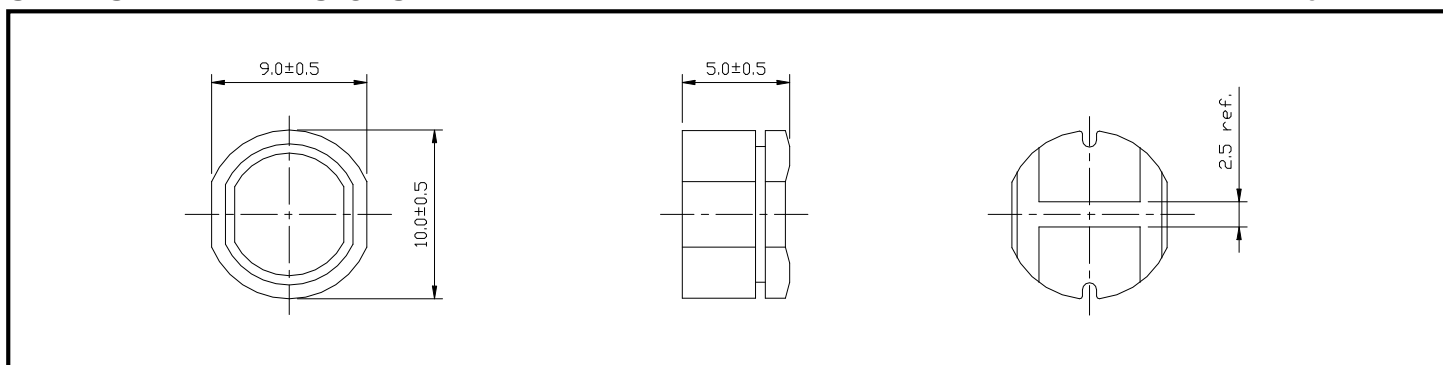

PACKAGING SPECIFICATION

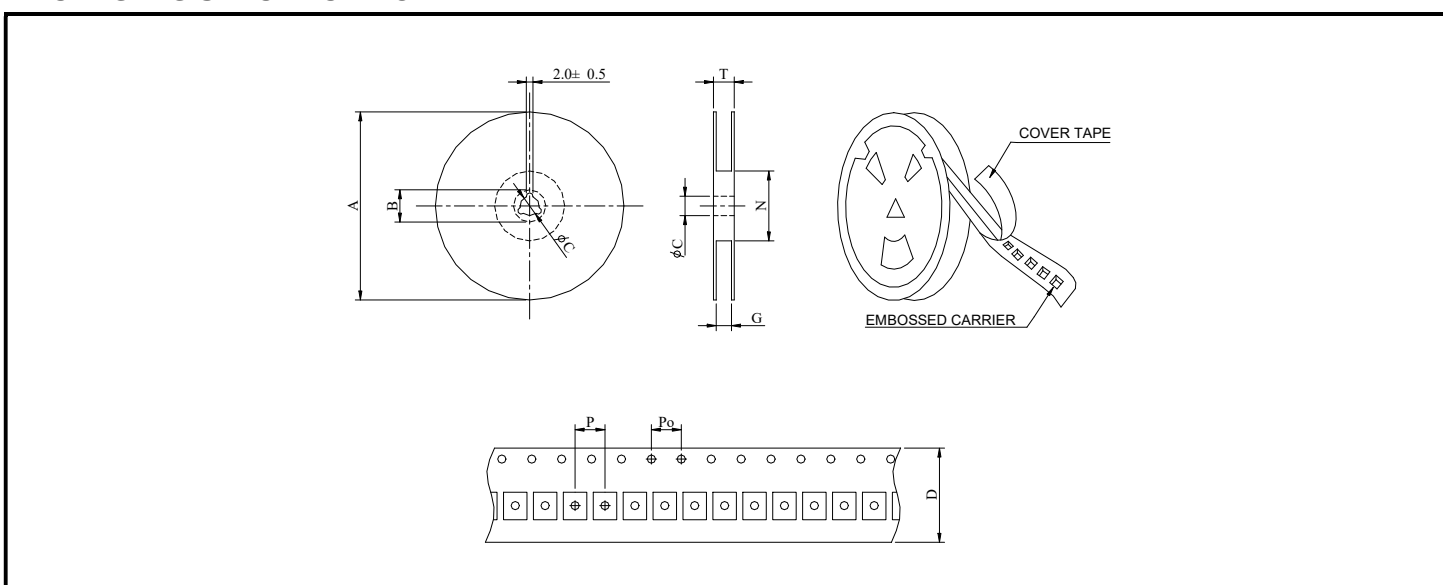

SERIES	STAYLE	Q'TY (PCS)	DIMENSIONS (m/m)								
			A	B±0.8	C±0.5	D	G ⁺⁰	N ⁻⁰	P	Po	T
SRS105B	13-24	500	330	21	13	24	26	50	12	4	30.4

Shielded SMD Power Inductors - SRS105B SERIES



SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μH)	DCR (Ω) (Max.)	IDC (A) (Max.)	TEST FREQ. (Freq.)
SRS105B-100M-LF	10±20%	0.06	2.06	2.52MHz
SRS105B-120M-LF	12±20%	0.07	1.94	2.52MHz
SRS105B-150M-LF	15±20%	0.07	1.72	2.52MHz
SRS105B-180M-LF	18±20%	0.08	1.58	2.52MHz
SRS105B-220M-LF	22±20%	0.08	1.42	2.52MHz
SRS105B-270M-LF	27±20%	0.10	1.32	2.52MHz
SRS105B-330M-LF	33±20%	0.11	1.16	2.52MHz
SRS105B-390M-LF	39±20%	0.12	1.10	2.52MHz
SRS105B-470M-LF	47±20%	0.14	1.00	2.52MHz
SRS105B-560M-LF	56±20%	0.19	0.93	2.52MHz
SRS105B-680M-LF	68±20%	0.21	0.85	2.52MHz
SRS105B-820M-LF	82±20%	0.28	0.79	2.52MHz
SRS105B-101M-LF	100±20%	0.34	0.72	1KHz
SRS105B-121M-LF	120±20%	0.37	0.63	1KHz
SRS105B-151M-LF	150±20%	0.51	0.55	1KHz
SRS105B-181M-LF	180±20%	0.57	0.50	1KHz
SRS105B-221M-LF	220±20%	0.78	0.47	1KHz
SRS105B-271M-LF	270±20%	0.87	0.41	1KHz
SRS105B-331M-LF	330±20%	1.20	0.37	1KHz
SRS105B-391M-LF	390±20%	1.34	0.35	1KHz
SRS105B-471M-LF	470±20%	1.50	0.33	1KHz

- DC current at which the inductance drops 10% (typ) from its value without current.
- Operating temperature range -40°C to +125°C ,
- Electrical specifications at 25°C.