

## ECU100M Series

Slide-in Mounting

100M/Gigabit Industrial Fiber Converter Managed Daughter Card

- Support up to 1 100M copper port, 1 100M fiber port, 2 Gigabit copper ports or 2 Gigabit fiber ports
- Input voltage 5VDC
- Support -40~75 °C wide operating temperature range



Industrial Grade

## Introduction


ECU100M series are 100M/Gigabit industrial fiber converter managed daughter cards. The series include five types of products and provide 100M copper port, 100M fiber port, Gigabit copper port, Gigabit fiber port and Gigabit SFP slot. It adopts slide-in mounting. And the daughter card could be used with the media converter management card, media converter rack, media converter.

The DIP switch could implement functions like local and remote control, and flow control. The 1 copper port + 1 fiber port products also support LFP. When the LFP function is turned on and the port has link failures, the LFP indicator would be on to send alert, offering quick troubleshooting on the scene. Hardware adopts low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, railway transportation, smart city, safe city, new energy, aerospace, intelligent manufacturing, military project and other industrial fields.


## Dimension

Unit:mm


- ECU100M-1T1F

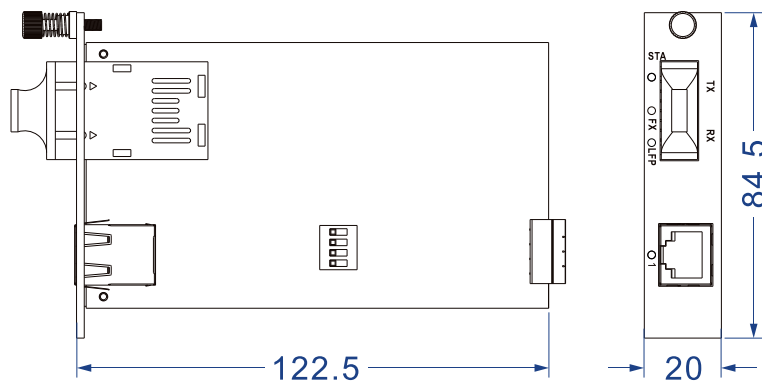


- ECU100M-2T1F

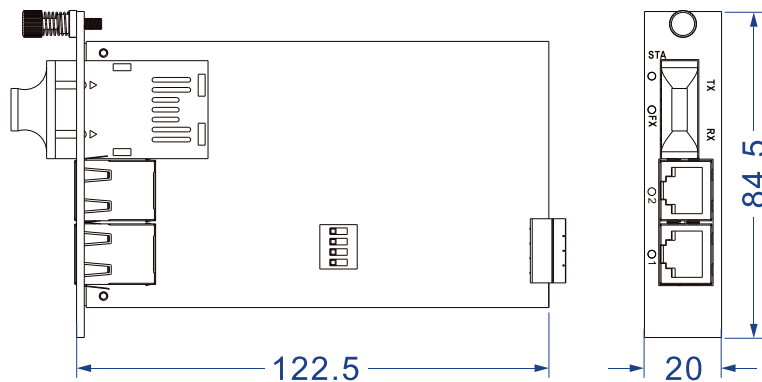


- ECU100M-1GT1GF

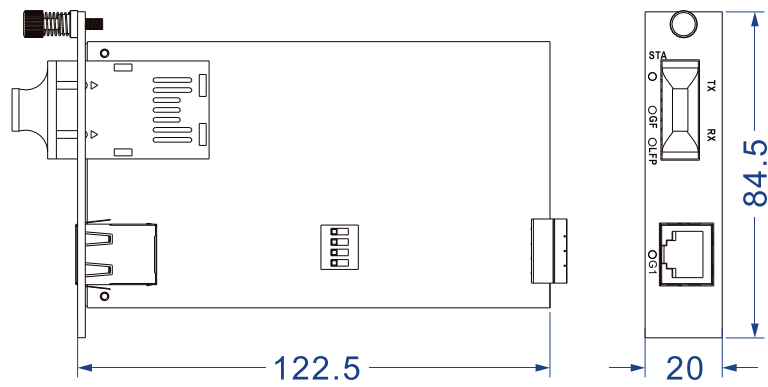

● ECU100M-2GT1GF

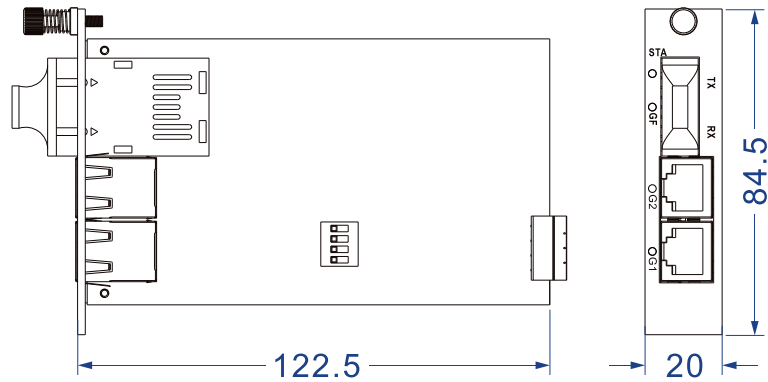

● ECU100M-1GT2GS

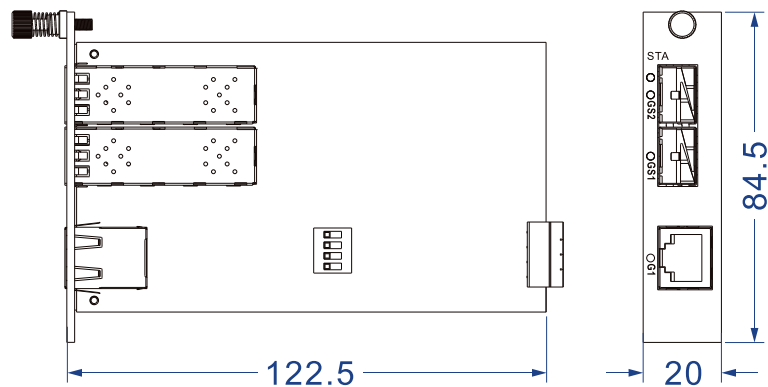

## Specification

Standard & Protocol	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3z for 1000Base-X IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow Control
---------------------	---

### Interface

Copper port: 10/100Base-T(X) or 10/100/1000Base-T(X), RJ45, Automatic Flow Control, Full/half Duplex Mode,

MDI/MDI-X Autotuning

1×9 fiber port: 100Base-FX or 1000Base-FX

SFP slot: 1000Base-X, SFP slot

Indicator	STA Running Indicator, Port Indicator, LFP Indicator(1 copper port 1 fiber port product only)
Switch Property	<p>Transmission mode: store and forward</p> <p>Switch time delay: &lt; 10μs</p> <p>100M Products:</p> <ul style="list-style-type: none"> <li>● MAC address: 2K</li> <li>● Packet buffer size: 0.75M</li> <li>● Backplane bandwidth: 0.8G</li> </ul> <p>Gigabit Products:</p> <ul style="list-style-type: none"> <li>● MAC address: 8K</li> <li>● Packet buffer size: 1M</li> <li>● Backplane bandwidth: 14G</li> </ul>
Power supply	Input voltage: 5VDC
Power consumption	<p>No-load: ≤1.5W@5VDC</p> <p>Full-load: ≤2.0W@5VDC</p>
Working environment	<p>Operating temperature: -40~75 °C</p> <p>Storage temperature:-40~85 °C</p> <p>Relative humidity: 5%~95%(no condensation)</p>
Physical Characteristic	<p>Installation: slide-in mounting</p> <p>Weight: ≤80g</p> <p>Dimension (W x H x D): 84.5mm×20.0mm×122.5mm</p>
Industrial Standard	<p>IEC 61000-4-2 (ESD, electrostatic discharge)</p> <ul style="list-style-type: none"> <li>● Air discharge: ±8kV</li> <li>● Contact discharge: ±6kV</li> </ul> <p>IEC 61000-4-4 (EFT, electrical fast transient pulses)</p> <ul style="list-style-type: none"> <li>● Power supply: ±2kV</li> <li>● Signal: ±1kV</li> </ul> <p>IEC 61000-4-5 (Surge)</p> <ul style="list-style-type: none"> <li>● Power supply: common mode±2kV, differential mode±1kV</li> <li>● Signal: common mode ±2kV, differential mode ±1kV</li> </ul>

Certification	CE、FCC、RoHS certification
Warranty	3 years



## Ordering Information

Available Models	100M Copper Port	Gigabit Copper Port	100M Fiber Port	Gigabit Fiber Port	Gigabit SFP	Power Supply
ECU100M-1T1F	1	—	1	—	—	5VDC
ECU100M-2T1F	2	—	1	—	—	
ECU100M-1GT1GF	—	1	—	1	—	
ECU100M-2GT1GF	—	2	—	1	—	
ECU100M-1GT2GS	—	1	—	—	2	



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: [ics@3onedata.com](mailto:ics@3onedata.com)

Website: [www.3onedata.com](http://www.3onedata.com)

◀ Please scan our QR code for more details

\*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.