



## ES209G-1GF

DIN-Rail Mounting

9-port Full Gigabit Unmanaged Ethernet Switch

- Support 1 Gigabit fiber port, 8 Gigabit copper ports
- Input voltage: 12~48VDC, dual power supply, reverse polarity protection
- Support 0~55°C wide operating temperature range




## Introduction

ES209G is 9-port full Gigabit unmanaged Ethernet switches. The product provides Gigabit fiber port and Gigabit SFP slot. It adopts DIN-Rail mounting to meet the requirements of different application scenes.

Power supply input is two independent power supply circuits, which can ensure the device normal operation when one of the power supplies breaks down. DIP switch supports one-click configuration of flow control and copper port isolation. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, intelligent manufacturing and other industrial fields.

## Dimension

Unit: mm

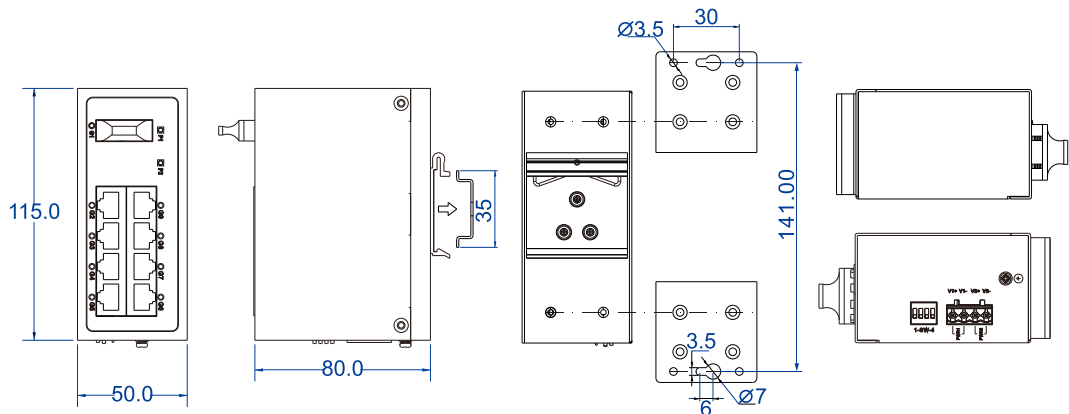

## Specification

Standard & Protocol	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X IEEE 802.3x for Flow Control
---------------------	--

### Interface

Copper port: 10/100/1000Base-T(X), RJ45, Automatic Flow Control, Full/half Duplex Mode, MDI/MDI-X Autotuning  
 Fiber port: 1000Base-X, SC interface

LED Indicator	Power Supply Indicator, Port Indicator
Switch Property	Transmission mode: store and forward MAC address: 8K Packet buffer size: 1Mbit Backplane bandwidth: 20G Switch time delay: < 10μs
Power Requirement	12~48VDC, 4-pin 7.62mm pitch terminal blocks Dual power supply redundancy, reverse polarity protection
Power Consumption	No-load: 3.9W@24VDC Full-load: 8.1W@24VDC
Environmental Limit	Operating temperature: 0~55°C Storage temperature: -10~65°C Relative humidity: 5% ~ 95% ( no condensation )
Physical Characteristic	Housing: IP30 protection, metal Installation: DIN-Rail mounting Dimension (W x H x D): 50mm×115mm×80mm Weight: 450g
Industrial Standard	IEC 61000-4-2 (ESD, Electrostatic Discharge), Level 1 <ul style="list-style-type: none"><li>● Air discharge: ±2kV</li><li>● Contact discharge: ±2kV</li></ul> IEC 61000-4-5 (Surge), Level 2 <ul style="list-style-type: none"><li>● Power supply: common mode ±1kV, differential mode ±0.5kV</li><li>● Ethernet port: ±1kV</li></ul> Shock: IEC 60068-2-27 Free fall: IEC 60068-2-32 Vibration: IEC 60068-2-6
Certification	CE, FCC, RoHS
Warranty	3 years

## Ordering Information

Available Models	Gigabit Fiber Port	Gigabit Copper Port	Power Supply Range
ES209G-1GF	1	8	12~48VDC dual power supply



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: [ics@3onedata.com](mailto:ics@3onedata.com)

Website: [www.3onedata.com](http://www.3onedata.com)

◀ Please scan our QR code for more details

\*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.