

# Radial Polymer Aluminum Solid Electrolytic Capacitor – PSS

## FEATURES

- Low ESR Series
- Load Life of 2000Hours, 105°C
- High Ripple Current

## SPECIFICATIONS

Category Temperature Range (°C) -55°C ~ +105°C  
 Rated Voltage Range (V) 2.5V ~ 25V.DC  
 Capacitance Tolerance (+20°C, 120Hz) ±20%

Leakage Current  $I \leq 0.2CV$  or  $500 \mu A$  whichever is greater

Dissipation Factor (20°C, 120Hz) Less than or equal to the specified value. After 2 minutes application of rated Voltage at 20°C



Rated Voltage (V)	2.5	4	6.3	6.8	7.5	10	12	16	20	25
tanδ (Max.)	0.08					0.12				
Z(-25°C)/Z(+20°C)	≤1.25					(100KHz)				
Z(-55°C)/Z(+20°C)	≤1.25									

Endurance The specifications listed below shall be satisfied when the capacitors are restored to 20°C after application of rated voltage for 2000 hours at 105°C.

Appearance	No significant damage
Capacitance change	≅ ± 20% of the initial value
D.F.(tanδ)	≅ 150% of the specified value
ESR	≅ 150% of the specified value
Leakage current	≅ The specified value

Damp Heat (Steady State) The specifications listed below shall be satisfied when the capacitors are restored to 20°C after application of rated voltage for 1000 hours at 60°C, 90% ~ 95% RH.

Appearance	No significant damage
Capacitance change	≅ ± 20% of the initial value
D.F.(tanδ)	≅ 150% of the specified value
ESR	≅ 150% of the specified value
Leakage current	≅ The specified value

Surge Voltage Surge Voltage=Rated voltage × 1.15(V)


The capacitors shall be subjected to 1000 cycles each consisting of charge with the surge voltages specified at 105°C for 30 seconds through a protective resistor ( $R_c=1k\Omega$ ) and discharge for 5 minutes 30 seconds.

Appearance	No significant damage
Capacitance change	≅ ± 20% of the initial value
D.F.(tanδ)	≅ 150% of the specified value
ESR	≅ 150% of the specified value
Leakage current	≅ The specified value

## Frequency Coefficient For Ripple Current

Frequency	120Hz≤freq.<1KHz	1KHz≤freq.<10KHz	10KHz≤freq.<100KHz	100KHz≤freq.<500KHz
Coefficient	0.05	0.3	0.7	1

## DIMENSIONS (mm)

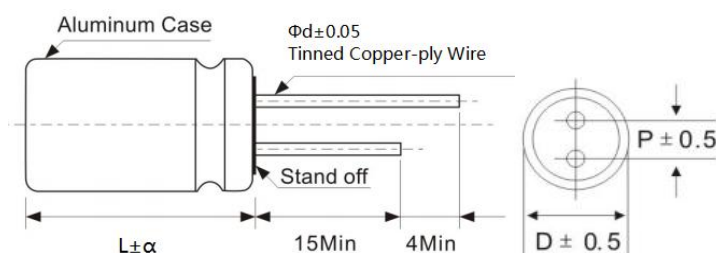

ΦD	5	6.3	8	10
P	2.0	2.5	3.5	5.0
Φd	0.5	0.6	0.6	0.6

α	(L < 16)	1.0
	(16 ≤ L < 22)	1.5
	(L ≥ 22)	2.0

Please visit our website to get more update data, those data & specification are subject to change without notice.

# Radial Polymer Aluminum Solid Electrolytic Capacitor – PSS

## DIMENSIONS & CHARACTERISTICS

Rated Voltage	Rated Capacitance (μF)	Case Size ΦDxL (mm)	ESR (mΩ) at 20°C, 100 KHz	Leakage Current (μA)	Rated Ripple Current (mArms/105°C /100kHz)
2.5	560	5x8	18	500	2900
		6.3x8	15	500	3500
	680	6.3x8	15	500	3500
		8x9	12	500	5200
	820	6.3x8	15	500	3500
		8x9	12	500	5200
	1000	8x9	12	500	5500
		8x12	12	500	5500
	1200	8x9	12	600	5500
		8x12	12	600	5500
4	560	6.3x8	15	500	3100
		8x9	12	500	5100
	680	6.3x8	15	544	3500
		8x9	12	544	5100
	820	6.3x9	15	656	4100
		8x9	12	656	5100
	1000	6.3x12	15	800	4100
		8x9	12	800	5100
	1200	6.3x12	15	960	4500
		8x9	12	960	5100
6.3	220	5x7	18	500	2690
		5x8	18	500	2690
	270	5x8	18	500	2690
		5x8	18	500	2690
	330	5x9.5	18	500	2690
		6.3x8.5	15	500	3100
	390	5x9.5	16	500	3100
		6.3x8	15	500	3100
	470	5x9.5	15	592	3300
		6.3x8.5	15	592	4100
	560	5x11	15	706	3500
		6.3x8.5	15	706	4100
		8x9.5	12	706	5100
	680	5x12	15	857	4100
		6.3x8.5	15	857	4100
		8x9	12	857	5100
	820	6.3x9.5	15	1033	4500
		6.3x11.5	15	1033	4800
		8x9.5	12	1033	5100
	1000	6.3x11.5	14	1260	4800
		8x9.5	12	1260	5100
		8x12	12	1260	5500
	1200	6.3x12	12	1512	4900
		8x9	12	1512	5100
8x12		12	1512	5500	
1500	8x12	12	1890	5500	
	10x12.5	12	1890	5900	
2200	10x12.5	12	2772	5900	

Please visit our website to get more update data, those data & specification are subject to change without notice.

# Radial Polymer Aluminum Solid Electrolytic Capacitor – PSS

## DIMENSIONS & CHARACTERISTICS

Rated Voltage	Rated Capacitance (μF)	Case Size ΦDxL (mm)	ESR (mΩ) at 20°C, 100 KHz	Leakage Current (μA)	Rated Ripple Current (mArms/105°C /100kHz)
7.5	270	5x8	18	500	2690
	330	6.3x8	16	500	3100
	390	6.3x8	16	585	3500
	470	6.3x8	16	705	3500
	560	6.3x8	16	840	3500
	680	6.3x12	16	1020	3800
			8x9	12	1020
	820	6.3x12	16	1230	3800
			8x9	12	1230
	1000	8x9	12	1500	4800
8x12		12	1500	5100	
1200	8x12	12	1800	5100	
	10x12.5	12	1800	5500	
1500	10x12.5	12	2250	5500	
10	100	5x8	20	500	1800
	150	5x8	20	500	1800
	220	5x8	20	500	2200
		6.3x8	16	500	2900
	270	6.3x8	16	540	2900
		5x8	20	660	2900
	330	6.3x8	16	660	3100
		6.3x8	16	780	3100
	390	6.3x12	16	780	3500
		6.3x8	16	940	3100
	470	8x9	14	940	4800
		6.3x9	16	1120	3500
	560	8x9	16	1120	4800
		6.3x11	16	1360	3500
	680	8x9	14	1360	4800
		8x9	14	1640	4800
	820	8x12	14	1640	5100
8x12		14	2000	5100	
1000	10x12.5	14	2000	5500	
	8x12	14	3000	5300	
1500	10x12.5	14	3000	5500	
	10x12.5	14	3000	5500	
12	220	5x9	20	528	2690
		6.3x8	18	528	3160
	330	5x9.5	20	792	2800
		6.3x8	18	792	3200
	390	6.3x8	18	936	3200
	470	6.3x12	18	1128	3500
		8x9	15	1128	4100
	560	6.3x8.5	18	1344	3500
		8x9	15	1344	4100
	680	6.3x8.5	7	816	5100
		8x9	15	1632	4100
	820	8x12	15	1968	4500
	1000	8x12	15	2400	4500
		10x12.5	12	2400	5200
1200	10x12.5	12	2880	5200	
1500	10x12.5	12	3600	5200	

Please visit our website to get more update data, those data & specification are subject to change without notice.

# Radial Polymer Aluminum Solid Electrolytic Capacitor – PSS

## DIMENSIONS & CHARACTERISTICS

Rated Voltage	Rated Capacitance (μF)	Case Size ΦDxL (mm)	ESR (mΩ) at 20°C, 100 KHz	Leakage Current (μA)	Rated Ripple Current (mArms/105°C /100kHz)
16	68	5x7	25	500	2100
	100	5x7.5	25	500	2100
		6.3x8	20	500	2100
	150	5x8	25	500	2100
	220	5x9	22	704	2690
		6.3x8.5	18	704	3100
		5x11	18	704	3100
		8x9	15	704	4100
	270	5x11	18	864	3100
		6.3x8.5	15	864	4100
		8x9	15	864	4500
	330	6.3x8.5	18	1056	3100
		6.3x11.5	18	1056	4100
		8x9	15	1056	4100
	470	6.3x11.5	18	1504	3500
		8x9.5	15	1504	4100
		8x12	15	1504	4200
		10x12	14	1504	4200
560	8x9	18	1792	3500	
	8x12	15	1792	4100	
680	8x12	15	2176	4500	
	10x12	14	2176	4500	
820	8x12	15	2624	4500	
	10x12	14	2624	4800	
1000	8x12	15	3200	4800	
	10x12	14	3200	5200	
1200	10x12.5	14	4800	5200	
25	68	6.3x8	40	500	2100
		8x9	30	500	3500
	82	6.3x8	40	500	2150
		8x9	30	500	3800
	100	6.3x8.5	40	500	2200
		5x9	40	500	2150
	150	6.3x8	40	750	4200
		6.3x12	35	750	4300
	220	6.3x8	40	1100	3800
		6.3x12	35	1100	3800
		8x12	25	1100	4200
		10x12	25	1100	4800
	330	6.3x12	35	1650	3800
		8x9	25	1650	4200
		8x12	25	1650	4200
	390	10x12	20	1650	4800
		6.3x12	35	1950	4200
		8x12	25	2350	4200
470	10x12	20	2350	4800	
	8x12	25	3400	4200	
680	10x12	20	3400	4800	
	8x12	20	4100	4800	
820	10x12.5	20	5000	4800	
1000	10x12.5	20	5000	4800	
35	100	6.3x8.5	10	350	2900
	470	10x12	10	1645	4900

Note: Reflow soldering can only be used for SMD Conductive Polymer Aluminum Solid Electrolytic Capacitor.

Radial Conductive Polymer Aluminum Solid Electrolytic Capacitor are not suitable for reflow soldering, but only for wave soldering.

Please visit our website to get more update data, those data & specification are subject to change without notice.