

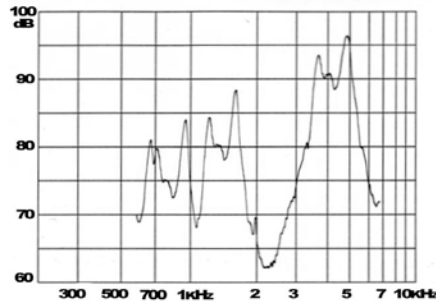
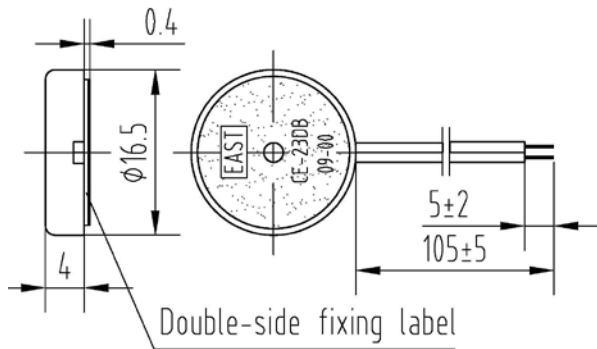
**External-driven Piezo Transducer****TFM-23D****FEATURES:** □

Rev.2

- Mini-size Structure
- Multiple Application
- Light and Compact

**APPLICATIONS:**

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

**CHARACTERISTICS:****DIMENSIONS: (Unit: mm)****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

5.0kHz/5V<sub>p-p</sub> Square Wave/10cm.....85dB(A)

Capacitance at 1000Hz.....14nF±30%

Allowable Input Voltage.....25V<sub>p-p</sub>

Max. Consumption

at 5.0kHz/5V<sub>p-p</sub> Square Wave.....3mA

Resonant Frequency..... 5.0±0.5kHz

Operating Temperature..... -20~+70°C

Case Material/Color.....PC/Black

Weight..... 0.9g

Wire Standard.....UL1061-30AWG

**PACKING INFORMATION:***(Packaging might vary without notice)*

Packing: 8000 pcs per export carton

Carton Size: 47×30.5×19 cm

G. Weight: 8.7 kgs N. Weight: 7.2 kgs

Address: No. 88. Jinhui. East Road Yinzhou, Ningbo, 315104 P. R. China

Sales Tel: +86-574-87809820(International)/87805605(Domestic)

Fax: +86-574-87803761