



External-driven Piezo Transducer

TFM-23T

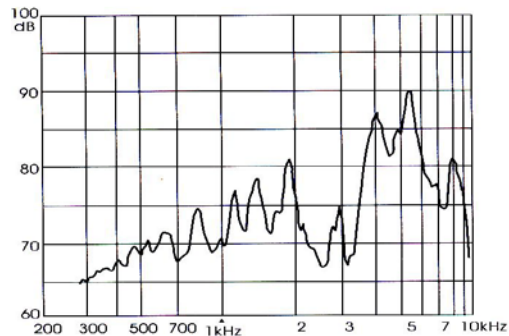
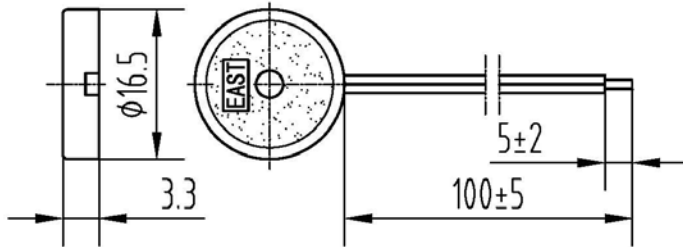
**FEATURES:** □

Rev.2

- Mini-size Structure
- Multiple Application
- Light and Compact

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

CHARACTERISTICS:**DIMENSIONS: (Unit: mm)****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

4.0kHz/9V_{p-p} Square Wave/10cm.....72dB(A)

Capacitance at 1000Hz.....9.5nF±30%

Allowable Input Voltage.....25V_{p-p}

Max. Consumption

at 4.0kHz/9V_{p-p} Square Wave.....2.5mA

Resonant Frequency.....4.0±0.5kHz

Operating Temperature.....-20~+70°C

Case Material/Color.....ABS/Black

Weight.....0.9g

Wire Standard.....UL1571-30AWG

PACKING INFORMATION:*(Packaging might vary without notice)*

Packing: 8000 pcs per export carton

Carton Size: 47×30.5×19 cm

G. Weight: 8.7 kgs N. Weight: 7.2 kgs

Address: No. 88. Jinhui. East Road Yinzhou, Ningbo, 315104 P. R. China

Sales Tel: +86-574-87809820(International)/87805605(Domestic)

Fax: +86-574-87803761