



Piezo Buzzer

FM-48D-905DA

FEATURES: □

Rev.1




- High Output
- High Reliability
- Wide Voltage


APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS: (Unit: mm)

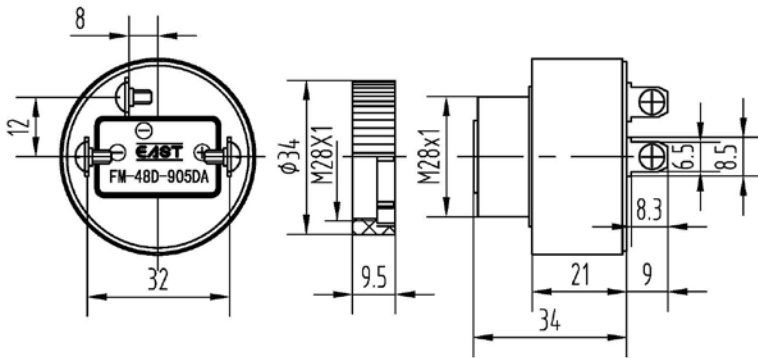

CHARACTERISTICS:

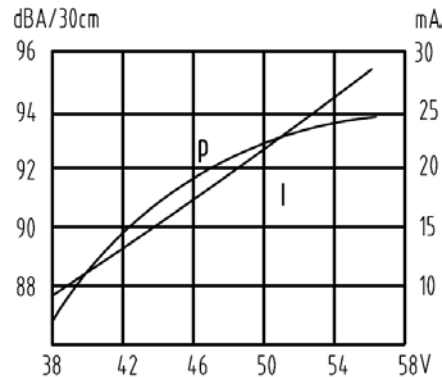

ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at

| | |
|---------------------------------|---------------------------|
| 48V _{DC/AC} /30cm..... | 80dB (A) |
| Rated Voltage..... | 48V _{DC/AC} |
| Operating Voltage..... | 38~58V _{DC/AC} |
| Max. Consumption..... | 30mA/48V _{DC/AC} |
| Oscillating Frequency..... | 2.9±0.5kHz |
| Tone Nature..... | Continuous+ Fast Pulse |
| Operating Temperature..... | -20~+70°C |
| Case Material/Color..... | ABS/Black |
| Weight..... | 35g |

Note: 1. Fast Pulse $f_F=5.0\text{Hz}\pm 20\%$ 2. This product is epoxy-potting type.

PACKING INFORMATION:

(Packaging might vary without notice)

Packing: 200 pcs per export carton

Carton Size: 47×30.5×31 cm

G. Weight: 8.5 kgs N. Weight: 7.0 kgs

Address: No. 88. Jinhui. East Road Yinzhou, Ningbo, 315104 P. R. China

Sales Tel: +86-574-87809820(International)/87805605(Domestic)

Fax: +86-574-87803761

REVISION HISTORY

| REV | DESCRIPTION | ISSUED BY/DATE | CHECKED | APPROVED |
|-----|-------------|-------------------------------|-------------|---------------|
| 1 | RELEASE | ZHANGCHUNLEI Feb. 02, 2010 | WENGUANGJUN | WANGJIANCHENG |
| | | | | |
| | | | | |
| | | | | |
| | | | | |