




2. US-3616A



● Electro-Acoustical SPEC

• Outer Dimension	42.5 x 39.6 x T6.4 mm	
• Net Weight	10.5 ± 1g	
• Impedance	16Ω ± 15%	at 1kHz, 1Vrms
• Sound Pressure Level(SPL)	80dB ± 5dB at 1kHz	at 5.6Vo-p, 1 m, Square wave
• Rated/Max Input Power	0.5W / 1W	
• Resonance Frequency(Fo)	600Hz ± 20%	at 1Vrms
• Operation Temperature	-40°C ~ +85°C	

● Frequency Response Curve

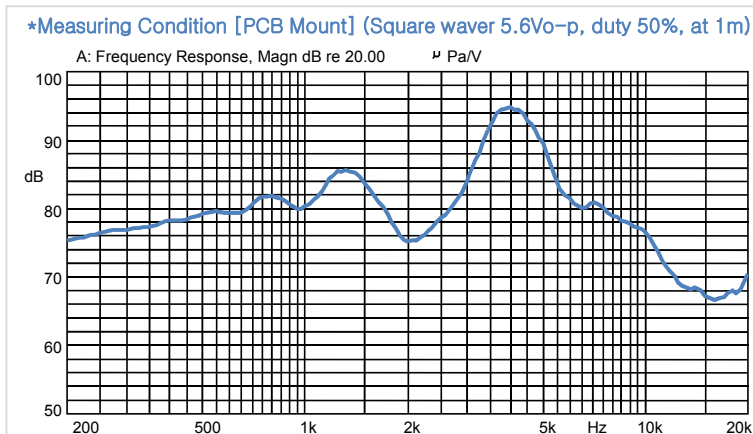

● Mechanical Dimension

