




3. US-3750B



● Electro-Acoustical SPEC

| | | |
|-----------------------------|--------------------|---------------------------|
| • Outer Dimension | Ø37 x T17 mm | |
| • Net Weight | 9.0 ± 1g | |
| • Impedance | 45Ω ± 10% | at 1kHz, 1Vrms |
| • Sound Pressure Level(SPL) | 90dB ± 3dB at 1kHz | at 0.2W, 0.1 m, Sine wave |
| • Rated/Max Input Power | 0.2W / 0.4W | |
| • Resonance Frequency(Fo) | 430Hz ± 15% | at 1Vrms |
| • Operation Temperature | -40°C ~ +105°C | |

● Frequency Response Curve

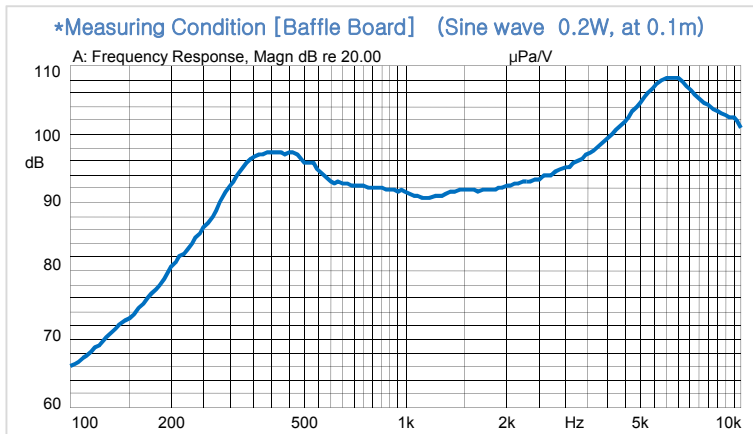

● Mechanical Dimension

