




## 6. US-3750C



### ● Electro-Acoustical SPEC

• Outer Dimension	Ø37 x T17 mm	
• Net Weight	11.8 ± 1g	
• Impedance	45Ω ± 10%	at 2kHz, 1Vrms
• Sound Pressure Level(SPL)	101dB ± 4dB at 1kHz	at 0.32W, 0.1 m, Sine wave
• Rated/Max Input Power	0.32W / 0.5W	
• Resonance Frequency(Fo)	870Hz ± 80Hz	at 1Vrms
• Operation Temperature	-40°C ~ +85°C	

### ● Frequency Response Curve

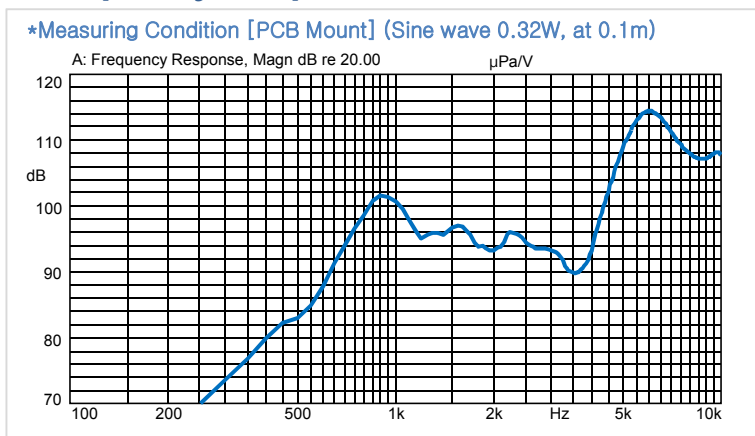

### ● Mechanical Dimension

