





## 9. US-4008K

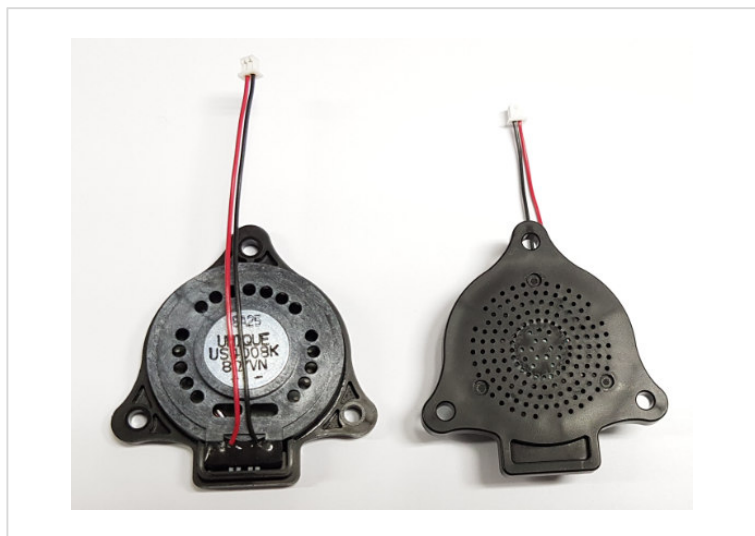

### ● Electro-Acoustical SPEC

|                             |                    |                          |
|-----------------------------|--------------------|--------------------------|
| • Outer Dimension           | Ø40 x T11.5 mm     |                          |
| • Net Weight                | 13.0 ± 1g          |                          |
| • Impedance                 | 8Ω ± 1Ω            | at 2kHz, 1Vrms           |
| • Sound Pressure Level(SPL) | 82dB ± 4dB at 1kHz | at 1W, 1 m,<br>Sine wave |
| • Rated/Max Input Power     | 1W / 1.5W          |                          |
| • Resonance Frequency(Fo)   | 560Hz ± 20%        | at 1Vrms                 |
| • Operation Temperature     | -40°C ~ +105°C     |                          |

### ● Frequency Response Curve

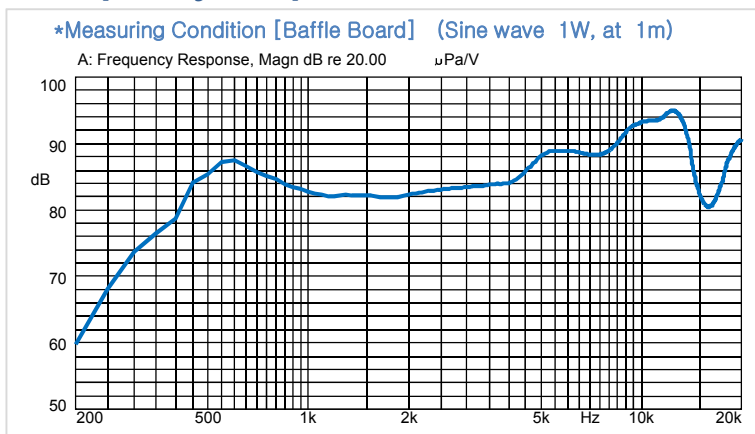

### ● Mechanical Dimension

