





### 10. US-4808E

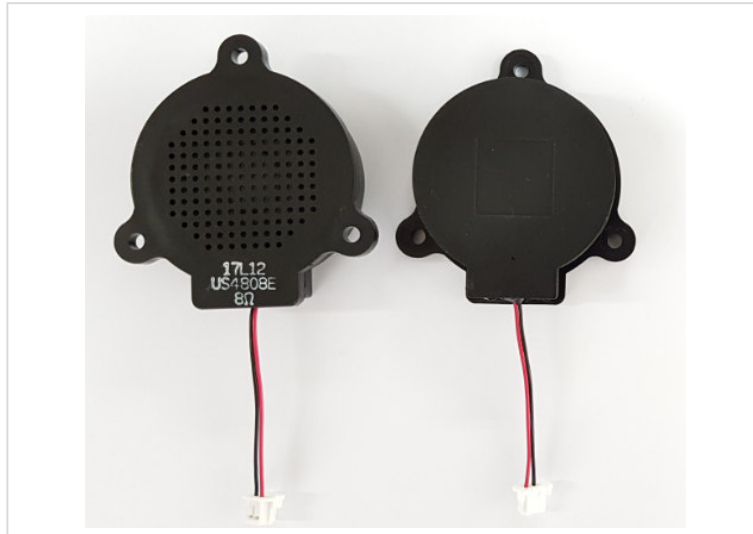

#### ● Electro-Acoustical SPEC

• Outer Dimension	Ø48 x T16 mm	
• Net Weight	22.0 ± 2g	
• Impedance	8Ω ± 15%	at 2kHz, 1Vrms
• Sound Pressure Level(SPL)	83dB ± 5dB at 1kHz	at 0.5W, 1 m, Sine wave
• Rated/Max Input Power	0.5W / 1W	
• Resonance Frequency(Fo)	760Hz ± 100Hz	at 1Vrms
• Operation Temperature	-40°C ~ +105°C	

#### ● Frequency Response Curve

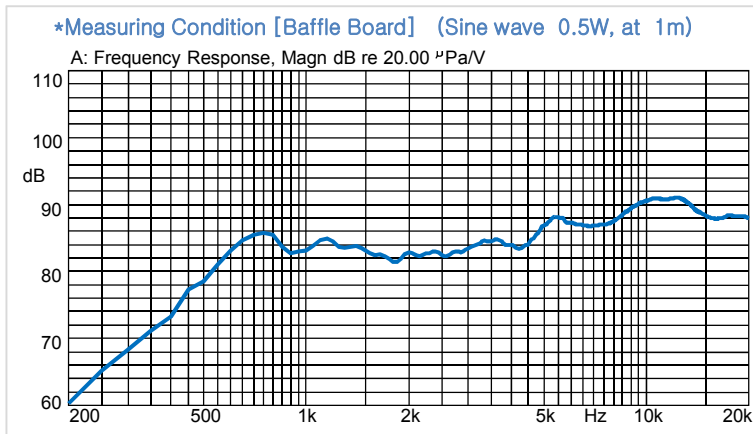

#### ● Mechanical Dimension

