


RoHS Compliant



REV	DATE	DESCRIPTION	ECN NO.	NAME
A1	18.06.19	PROPOSAL		KNIGHT

A
B
C
D
E

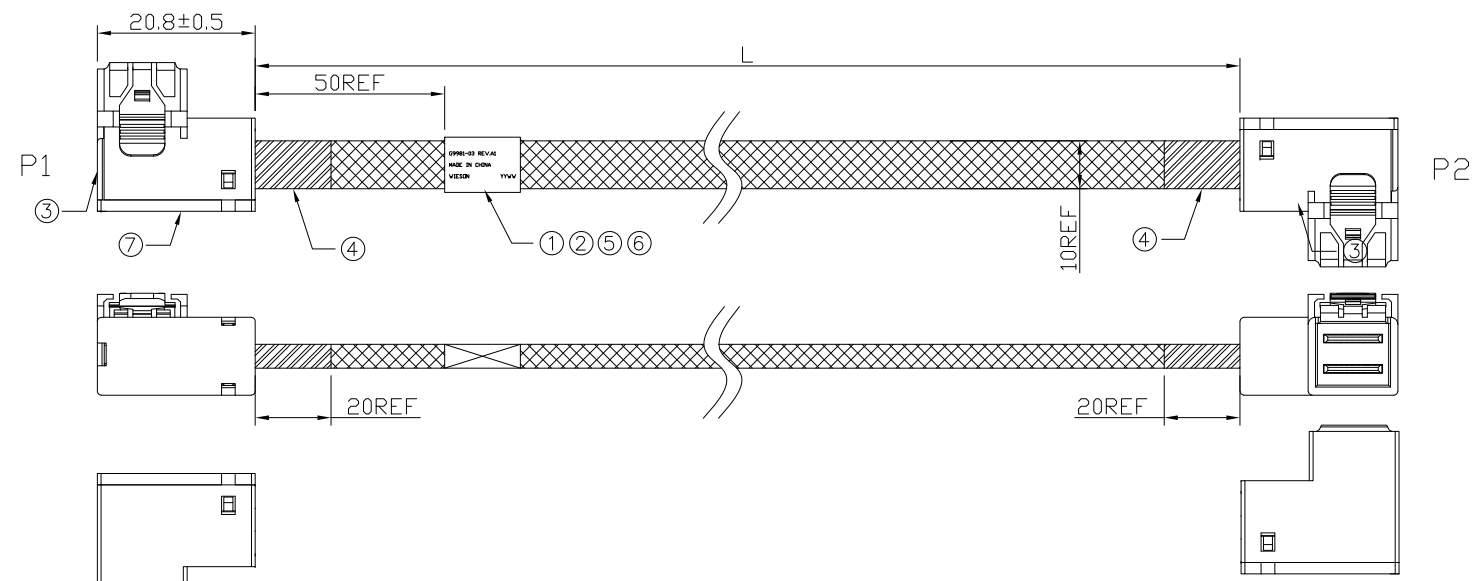

NOTES:

1. IMPEDANCE REQUIREMENT:
CABLE IMPEDANCE:100±10% OHMS.
2. OPERATING TEMPERATURE:0~80°C
3. CABLE COMPLIANT SAS 3.0 SPEC.
4. FLAMMABILITY: CONNECTOR MEET UL 94V-0
5. THE CABLE ASSEMBLY SHOULD ROHS2 (2011/65/EU) COMPLIANT.

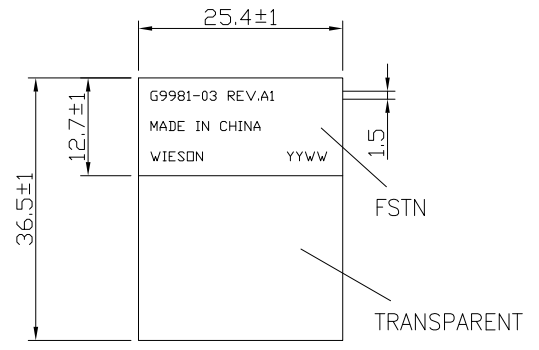

Mini SAS HD 4i PIN ASSIGNMENT

DETAIL LABEL


CUST NO.:

⑦	REAR COVER	R/A (LEFT) REAR COVER, MATERIAL: PBT+15%GF	2	WIESON TECHNOLOGIES CO., LTD	PART NO.: G9981-03			
⑥	WOVEN TUBE	WOVEN TUBE ϕ 10	AR					
⑤	LABEL	LABEL: W25.4MM	1	TITLE: MINI SAS HD SIDE EXIT TO SIDE EXIT TYPE CABLE				
④	ACETATE TAPE	ACETATE TAPE W20MM	AR	DRAWN BY	KNIGHT	DRAWING NO.	G9981-03	
③	COVER	R/A (LEFT) COVER, MATERIAL: PBT+15%GF	2	CHECKED BY	VINCENT	DRAWING SIZE	1 : 1	A4
②	CABLE	SIDE BAND, 30AWG	AR	APPROVED BY	VINCENT	UNIT	mm	
①	CABLE	SAS 30AWGx2C+2D+Shield	AR	SORTING NO.	WSC	PAGE	1 OF 2	
NO.	ITEM	DESCRIPTION	QTY	WIESON				

RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A1	18.06.19	PROPOSAL		KNIGHT

WIRING TABLE

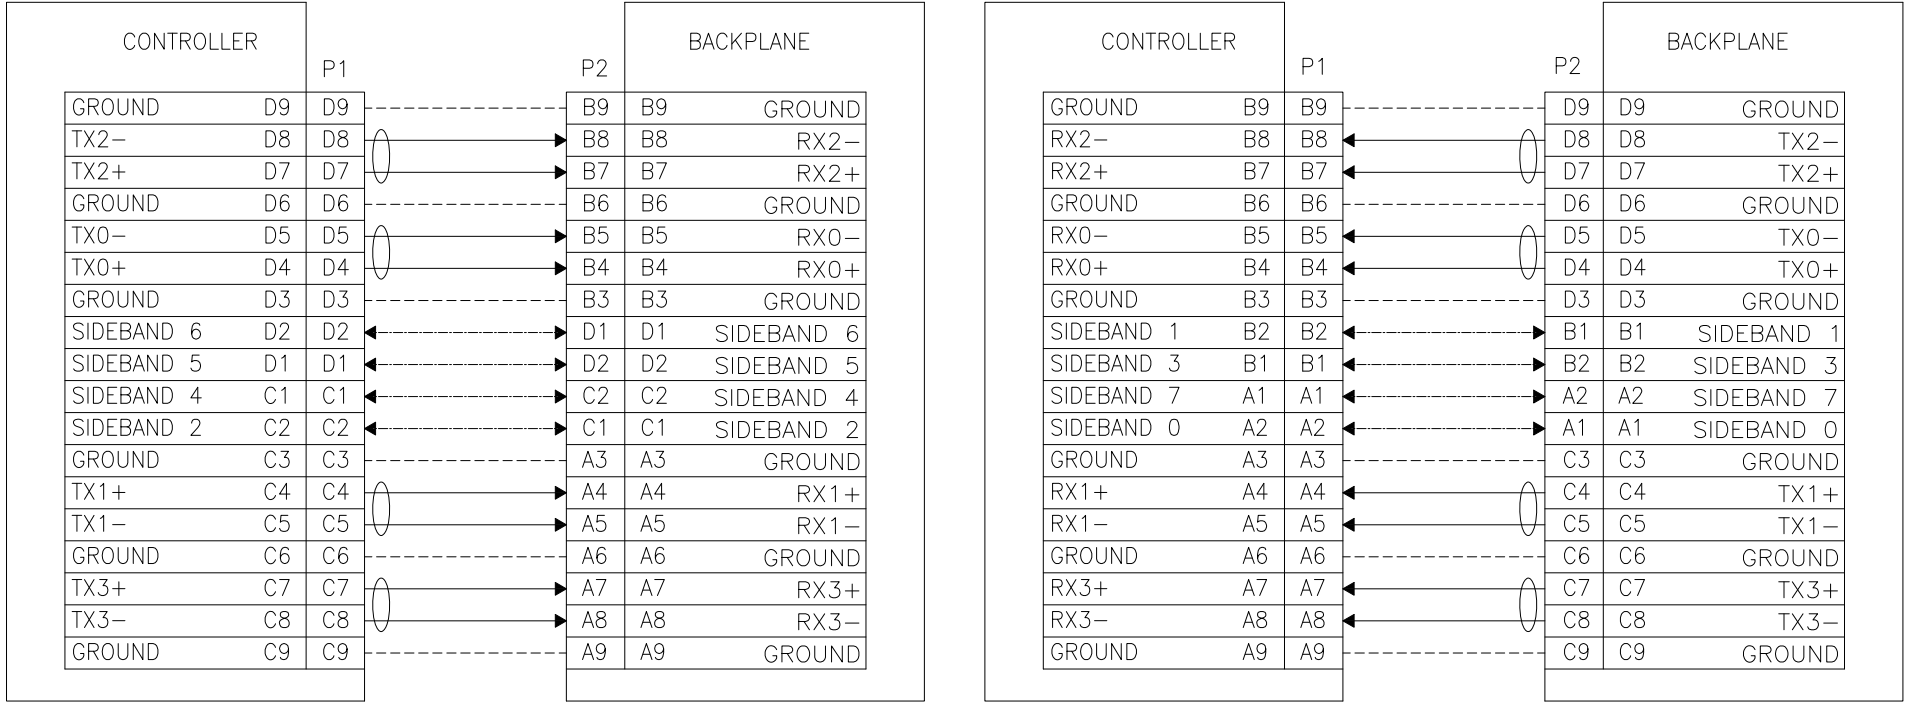

Legend :

- High-speed serial differential pairs
- Signal return
- Sideband signal

CUST NO.:
PART NO.: G9981-03

WIESON TECHNOLOGIES CO., LTD <small>WIESON</small>		PART NO.: G9981-03	
TITLE: MINI SAS HD SIDE EXIT TO SIDE EXIT TYPE CABLE			
DRAWN BY	KNIGHT	DRAWING NO.	G9981-03
CHECKED BY	VINCENT	DRAWING SIZE	1 : 1 A4
APPROVED BY	VINCENT	UNIT	mm
SORTING NO.	WSC	PAGE	2 OF 2