


| REV | DATE | DESCRIPTION | ECN NO. | NAME |
|-----|----------|-------------|---------|--------|
| A1 | 18.06.19 | PROPOSAL | | KNIGHT |


RoHS Compliant

A
B
C
D
E

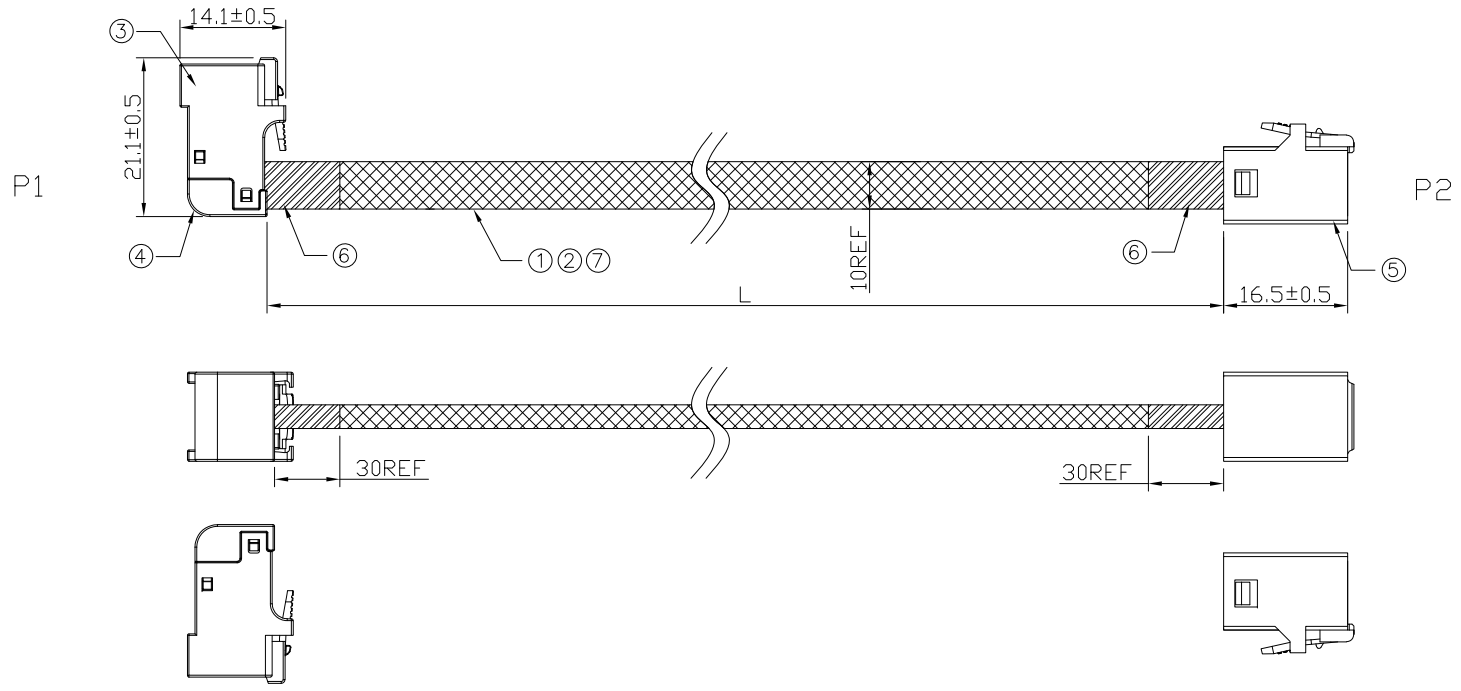

NOTES:

1. IMPEDANCE REQUIREMENT:
CABLE IMPEDANCE: 100±15% OHMS.
2. OPERATING TEMPERATURE: 0~80°C
3. CABLE COMPLIANT SAS 3.0 SPEC.
4. FLAMMABILITY: CONNECTOR MEET UL 94V-0
5. THE CABLE ASSEMBLY SHOULD ROHS2 (2011/65/EU) COMPLIANT.



CUST NO.:


| | | | | | | |
|-----|--------------|------------------------------------|-----|--|-----------------------|-----------------------|
| ⑦ | WOVEN TUBE | WOVEN TUBE $\phi 10$ | AR | WIESON TECHNOLOGIES CO., LTD WIESON | PART NO.: G9981-05 | |
| ⑥ | ACETATE TAPE | ACETATE TAPE W30MM | AR | | | |
| ⑤ | COVER | STR COVER, MATERIAL: PBT+15%GF | 1 | TITLE: MINI SAS HD STR TO REVERSE RA TYPE CABLE | DRAWING NO. G9981-05 | |
| ④ | COVER | RA REAR COVER, MATERIAL: PBT+15%GF | 1 | | | |
| ③ | COVER | RA COVER, MATERIAL: PBT+15%GF | 1 | | | |
| ② | CABLE | SIDE BAND, 30AWG | AR | | | |
| ① | CABLE | SAS 30AWGx2C+2D+Shield | AR | | | |
| NO. | ITEM | DESCRIPTION | QTY | SORTING NO. | WCS | DRAWING SIZE 1 : 1 A4 |
| | | | | | | UNIT mm |
| | | | | | | PAGE 1 OF 2 |

RoHS Compliant

| REV | DATE | DESCRIPTION | ECN NO. | NAME |
|-----|----------|-------------|---------|--------|
| A1 | 18.06.19 | PROPOSAL | | KNIGHT |

WIRING TABLE

A
B
C
D
E

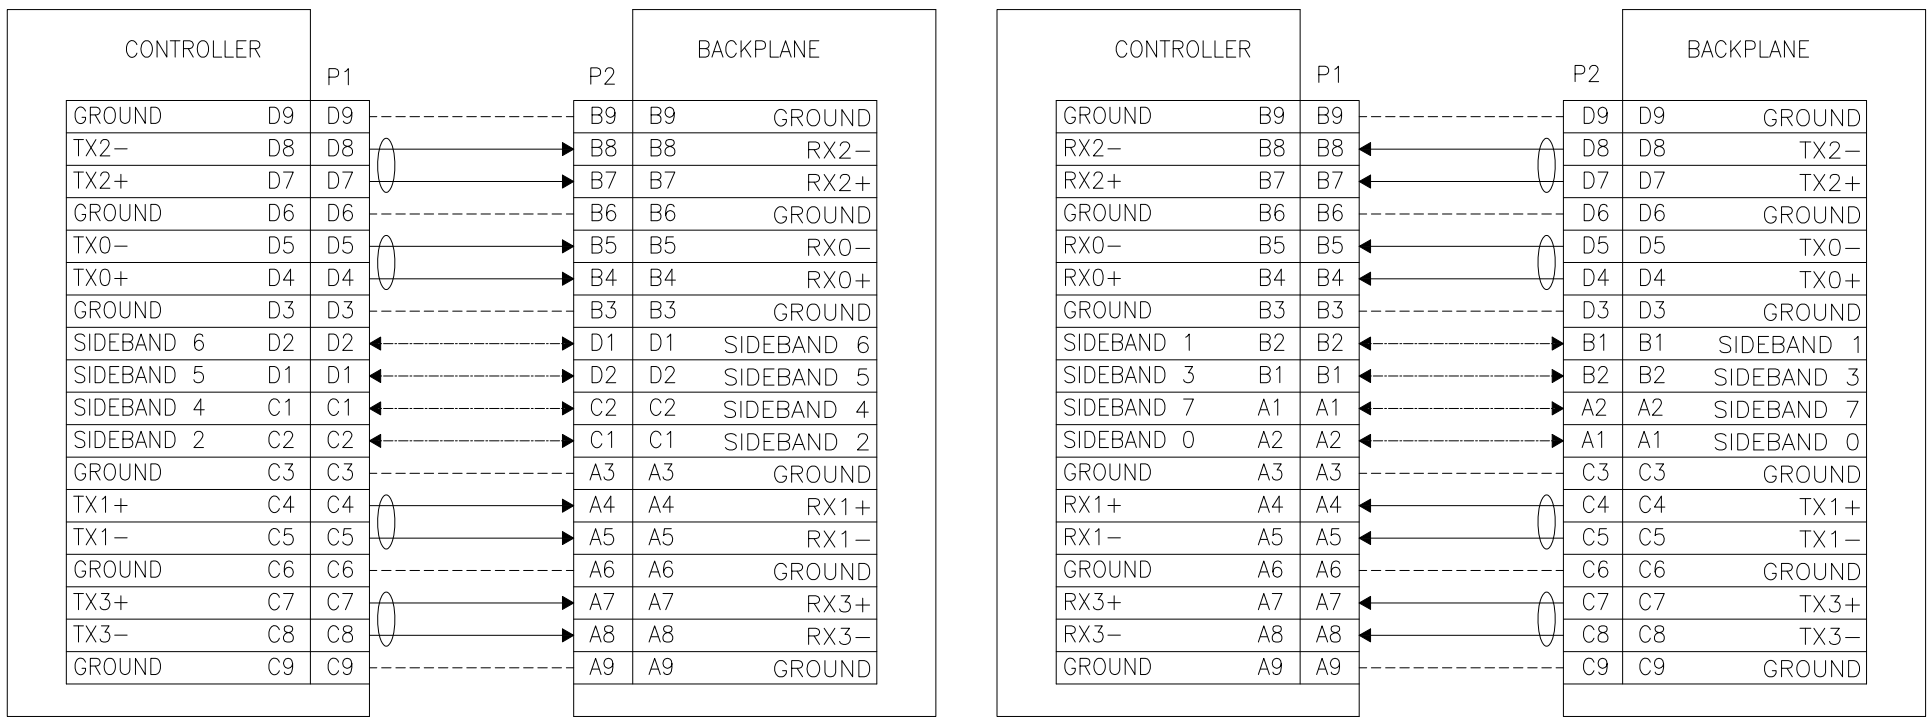

Legend :

- High-speed serial differential pairs
- Signal return
- Sideband signal

CUST NO.:
PART NO.: G9981-05

| | | | |
|--------------------|---------|--|----------|
| | | TITLE: MINI SAS HD STR TO REVERSE RA TYPE CABLE | |
| DRAWN BY | KNIGHT | DRAWING NO. | G9981-05 |
| CHECKED BY | VINCENT | DRAWING SIZE | 1 : 1 A4 |
| APPROVED BY | VINCENT | UNIT | mm |
| SORTING NO. | WSC | PAGE | 2 OF 2 |