

**RoHS Compliant**

G1212 SERIES SATA SMT TYPE 7+15P

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	08.08.20	PROPOSAL		wzbin
A1	13.06.06	△ MODIFY		LRP

**MATERIAL:**




HOUSING: LCP+30%G.F (UL94V-0)  
 HOUSING COLOR: BLACK  
 TERMINAL: PHOSPHOR BRONZE  
 TERMINAL PLATING: SELECTIVE Au IN CONTACT AREA, 100u"  
 min. Sn IN SOLDER TAIL AREA. BOTH  
 OVER 30u" min. Ni UNDERPLATE OVERALL  
 HARPOON: BRASS  
 HARPOON PLATING: 100u" min. Sn OVER 30u" min.  
 Ni UNDERPLATE OVERALL

ORDER INFORMATION  
 G1212-74 \*\* \*\* \*-00

00: LCP; BLACK

TERMINAL PLATING  
 01: 1u" Au  
 02: 15u" Au  
 03: 30u" Au  
 (SELECTIVE Au)

00: 7+15P

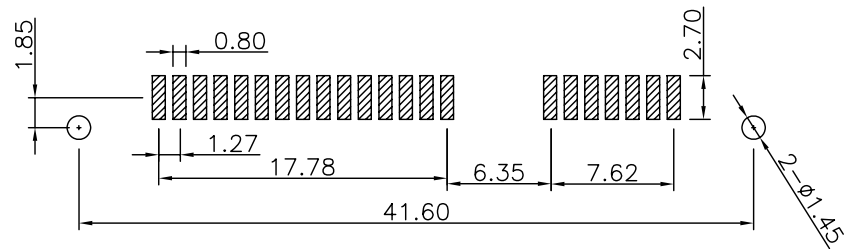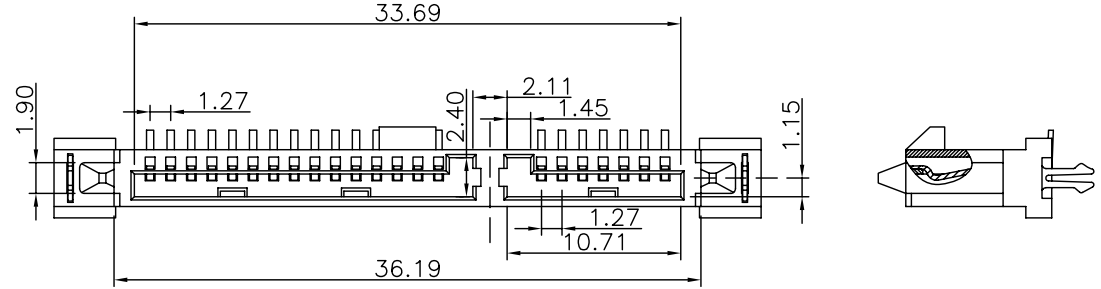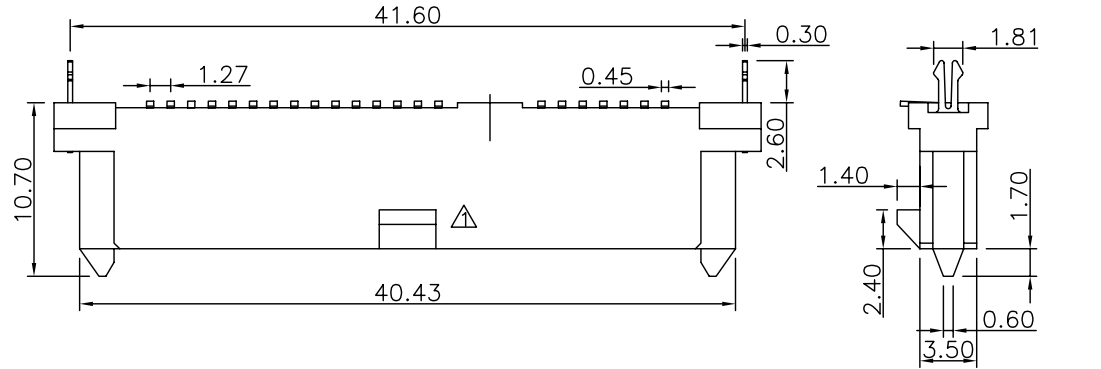

RECOMMENDED P.C.BOARD

NOTE: 1. P.C.B LAYOUT TOLERANCE: ±0.05mm  
 2. SMT COPLANARITY TOLERANCE Max: 0.13mm

GENERAL TOLERANCE ± 0.25mm	WIESON TECHNOLOGIES CO., LTD	PART NO.: G1212-74*****-00	
		DRAWN BY	wzbin(WSC)
GENERAL ANGLE TOLERANCE ± 3°	CHECKED BY	JINKENS	DRAWING NO. G1212-74*****-00
	APPROVED BY	JINKENS	DRAWING SIZE A4
SORTING NO.	C.A0089(WSC)	UNIT	mm
		PAGE	1 OF 1

PROPOSAL

[ARTICLE:044033 V6]