


RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	19.12.11	PROPOSAL		JULY

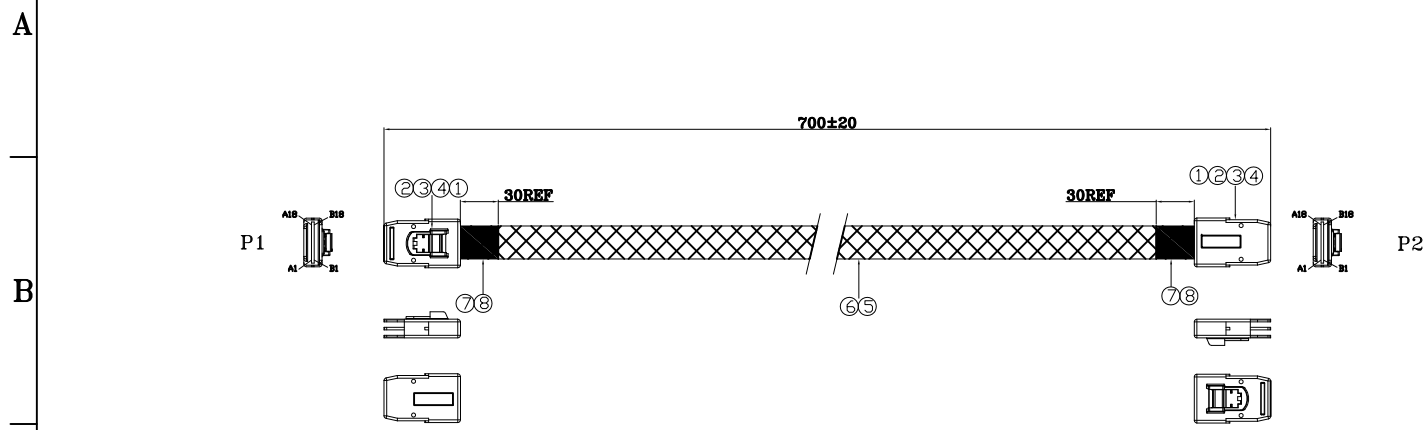

NOTES:
1. IMPEDANCE REQUIREMENT:
CABLE IMPEDANCE:100±10% OHMS.

P1			P2	
GROUND	A1		B1	GROUND
Rx 0+	A2	←	B2	Tx 0+
Rx 0-	A3	←	B3	Tx 0-
GROUND	A4		B4	GROUND
Rx 1+	A5	←	B5	Tx 1+
Rx 1-	A6	←	B6	Tx 1-
GROUND	A7		B7	GROUND
SIDEBAND7	A8	←	B8	SIDEBAND7
SIDEBAND3	A9	←	B9	SIDEBAND3
SIDEBAND4	A10	←	B10	SIDEBAND4
SIDEBAND5	A11	←	B11	SIDEBAND5
GROUND	A12		B12	GROUND
Rx 2+	A13	←	B13	Tx 2+
Rx 2-	A14	←	B14	Tx 2-
GROUND	A15		B15	GROUND
Rx 3+	A16	←	B16	Tx 3+
Rx 3-	A17	←	B17	Tx 3-
GROUND	A18		B18	GROUND
GROUND	B1		A1	GROUND
Tx 0+	B2	→	A2	Rx 0+
Tx 0-	B3	→	A3	Rx 0-
GROUND	B4		A4	GROUND
Tx 1+	B5	→	A5	Rx 1+
Tx 1-	B6	→	A6	Rx 1-
GROUND	B7		A7	GROUND
SIDEBAND0	B8	→	A8	SIDEBAND0
SIDEBAND1	B9	→	A9	SIDEBAND1
SIDEBAND2	B10	→	A10	SIDEBAND2
SIDEBAND6	B11	→	A11	SIDEBAND6
GROUND	B12		A12	GROUND
Tx 2+	B13	→	A13	Rx 2+
Tx 2-	B14	→	A14	Rx 2-
GROUND	B15		A15	GROUND
Tx 3+	B16	→	A16	Rx 3+
Tx 3-	B17	→	A17	Rx 3-
GROUND	B18		A18	GROUND

⑧	ACETATE TAPE	ACETATE TAPE, W:30MM, COLOR: BLACK.	2	WIESON TECHNOLOGIES CO., LTD PART NO.: G9981-15
⑦	SLEEVE	PLASTIC BRAID SLEEVE, Ø12	1	
⑥	HIGH SPEED WIRE	HIGH SPEED WIRE	8	
⑤	LOW SPEED ROUTE	LOW SPEED ROUTE (4PIN-SET)	2	
④	LATCH	STAINLESS STEEL.	2	TITLE: MINI SAS INTERNAL CABLE, 0.8PH 36P STRAIGHT TYPE
③	HOUSING	EXTERNAL MOLD HOUSING, PBT, COLOR: BLACK.	2	DRAWN BY JULY
②	HOUSING	INTERNAL MOLD HOUSING, PE, COLOR: NATURE.	2	CHECKED BY TON
①	PCB	MINI SAS PCB, CONTACT AREA Au(30u") OVER NICKEL.	2	APPROVED BY TOLIN
NO.	ITEM	DESCRIPTION	QTY	DRAWING NO. G9981-15
				DRAWING SIZE A4
				UNIT mm
				PAGE 1 OF 1