

**Piezo Buzzer****FM-48AA-907A****FEATURES:** □

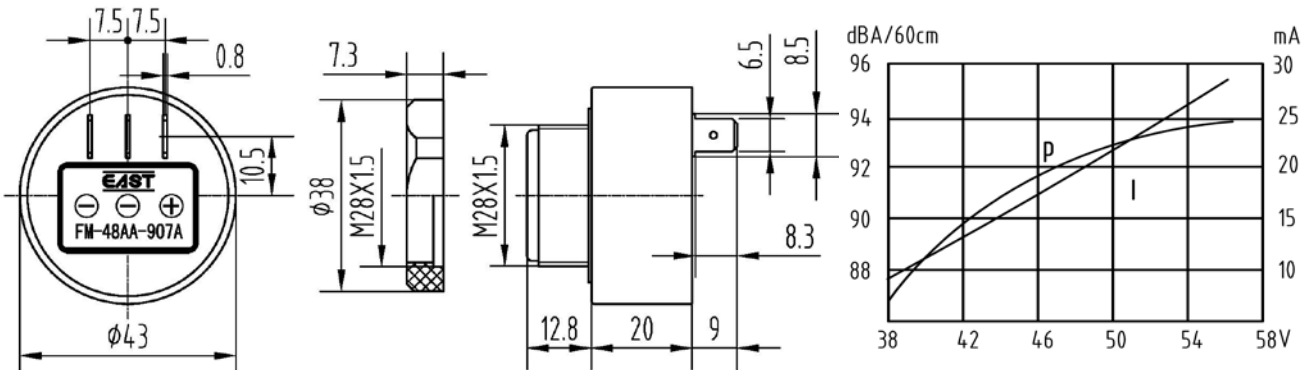
Rev.2



- High Output
- High Reliability
- Wide Voltage

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS: (Unit: mm)**CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

48V _{DC/AC} /60cm.....	90dB(A)
Rated Voltage.....	48V _{DC/AC}
Operating Voltage.....	38~58V _{DC/AC}
Max. Consumption.....	30mA/48V _{DC/AC}
Oscillating Frequency.....	2.9±0.5 kHz
Tone Nature.....	Continuous+ Slow Pulse
Operating Temperature.....	-20~+70°C
Case Material/Color.....	Fire-resistance ABS/Black
Weight.....	35g

Note: 1. Slow Pulse $f_s=1.2\text{Hz}\pm 20\%$ 2. This product is epoxy-potting type.**PACKING INFORMATION:***(Packaging might vary without notice)*

Packing: 200 pcs per export carton

Carton Size: 47×30.5×31 cm

G. Weight: 10.5 kgs N. Weight: 7.0 kgs

Address: No. 88. Jinhui. East Road Yinzhou, Ningbo, 315104 P. R. China

Sales Tel: +86-574-87809820(International)/87805605(Domestic)

Fax: +86-574-87803761